


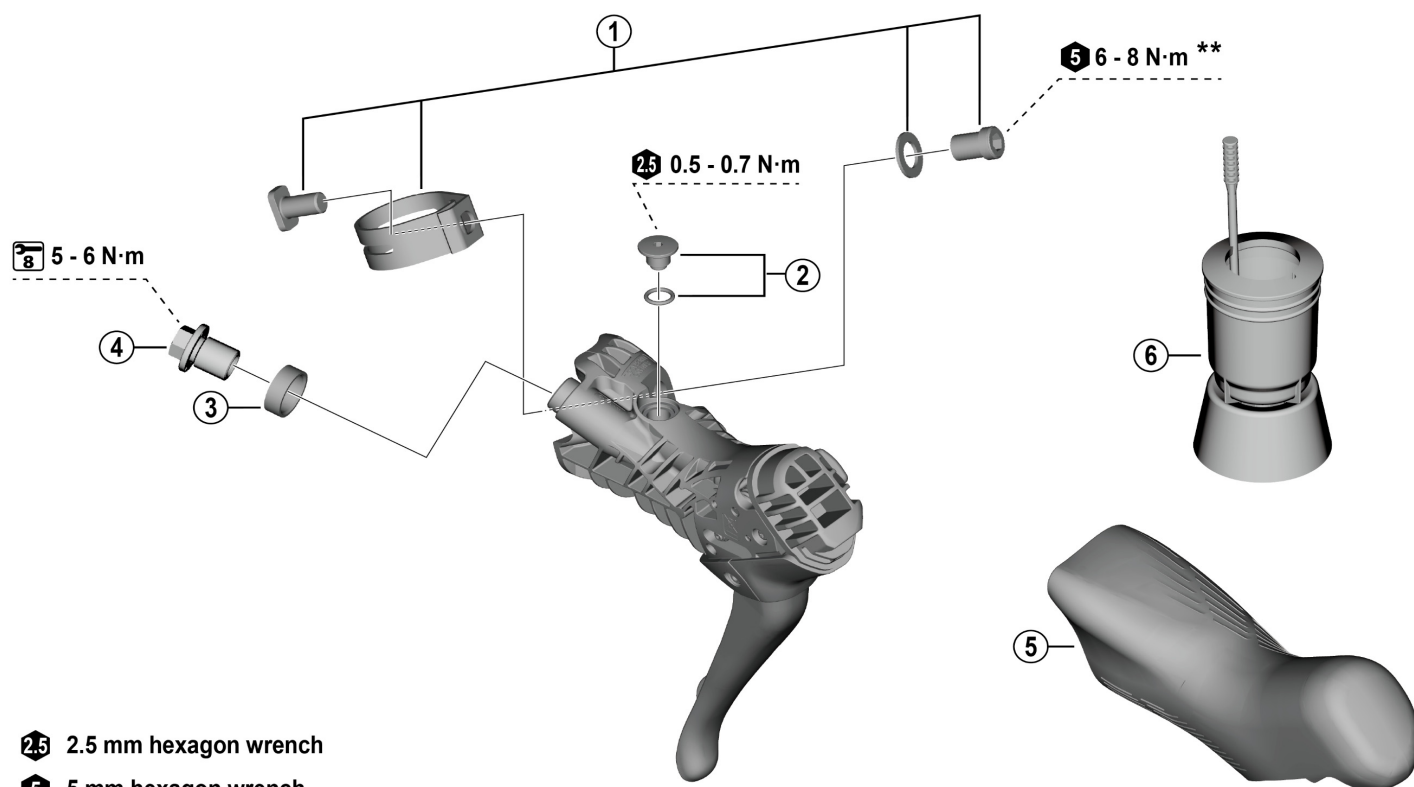

**2.5** 2.5 mm hexagon wrench

**5** 5 mm hexagon wrench

**8** 8 mm spanner

**\*\*** When installing parts onto a carbon frame/handlebar, confirm the recommended tightening torque with the carbon frame or handlebar manufacturer.  
This will prevent damage to the frame/handlebar due to over-torquing or inadequate securing of the components.

| ITEM NO. | SHIMANO CODE NO. | DESCRIPTION                               | INTERCHANGEABILITY |          |          |
|----------|------------------|-------------------------------------------|--------------------|----------|----------|
|          |                  |                                           | ST-R7170           | ST-R8170 | ST-R9270 |
| 1        | Y0RM98030        | Clamp band unit diameter (23.8 - 24.2 mm) | A                  |          |          |
| 2        | Y0RM98020        | Bleed screw and O-ring                    | A                  | B        | B        |
| 3        | Y0RM9801T        | Joint support ring                        | A                  | B        | B        |
| 4        | Y8RD02000        | Flange flare nut (M9/black)               | A                  | A        | A        |
| 5        | Y0RM98010        | Bracket covers (pair)                     | A                  |          |          |
| 6        | Y13000090        | TL-BR002 Funnel unit for M7 screw         | A                  | A        | A        |

A: Same parts.

B: Parts are usable, but differ in materials, appearance, finish, size, etc.

Absence of mark indicates non-interchangeability.

Specifications are subject to change without notice.

Torque information is listed.

Jan.-2026-5120

© Shimano Inc. I

**SHIMANO**

